

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

THE WORLD INTELLECTUAL PROPERTY ORGANIZATION IS A SPECIAL AGENCY OF THE UNITED NATIONS

(43) International Publication Date
2 October 2003 (02.10.2003)


PCT

(10) International Publication Number
WO 03/081728 A1

- (51) International Patent Classification⁷: H01R 13/523 (74) Common Representative: ABB AS; c/o ABB Group Services Center AB, Legal & Compliance/Intellectual Property, Forskargränd 8, S-721 78 Västerås (SE).
- (21) International Application Number: PCT/TB03/01072
- (22) International Filing Date: 24 March 2003 (24.03.2003) (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20021470 25 March 2002 (25.03.2002) NO
- (71) Applicant (*for all designated States except US*): ABB AS [NO/NO]; Postboks 94, N-1375 Billingstad (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): OESTERGAARD, Inge [NO/NO]; Oestliveien 32, N-1389 HEGGEDAL (NO).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: A SWITCHING DEVICE

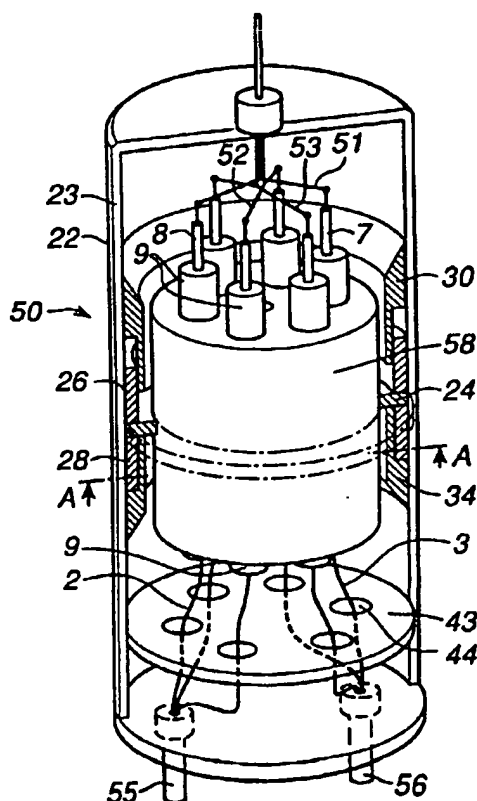

(57) Abstract: An electrical switching device, which comprising at least one ingoing (51) conductor and at least a first (2) and a second (3) outgoing conductor, and an arrangement for connecting and disconnecting the conductors by means of an axial movement. The arrangement comprises an axially movable element (58), which is movable between a first and a second position. The device is arranged such that when the axially movable element (58) is in the first position, the ingoing conductor (51) and the first outgoing conductor (2) are electrically connected, and the ingoing conductor (51) and the second outgoing conductor (3) are disconnected. When the axially movable element (58) is on the second position, the ingoing conductor (51) and the first outgoing conductor (2) are disconnected, and the ingoing conductor (51) and the second outgoing conductor (3) are electrically connected.

WO 03/081728 A1